



Technology Solutions

TEK-SOUND 4200B

Two Wire Ultrasonic Level Transmitter With Display



LEVEL




Introduction

The Tek-Sound 4200B Two Wire Ultrasonic Level Transmitter With Display utilizes enhanced ultrasonic technology to measure liquid level in various applications with superior accuracy and reliability.

Measuring Principle

Ultrasonic pulses generated by the transducer (antenna) system travel at the speed of sound toward the target medium. These pulses are reflected by the surface of the medium and received by the transducer system again. Due to the fact that the measurable time lapse between pulse emission and reception by antenna is proportional to the distance between antenna and highest level of target medium, the principle of ultrasonic level instrument can be illustrated as the following equation:

$S = C \times T/2$, S: distance, C: velocity of sound, T: time lapse.

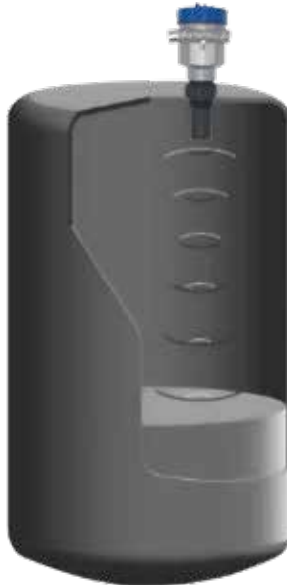

Features

- The advanced microprocessor and unique Echo Discovery processing technology, the ultrasonic level instruments can be used under various complex conditions.
- The false echo storage function assures that the instrument can detect the right echo even with the presence of multiple false echoes and present accurate measurement results eventually.
- The built-in temperature sensor inside the transducer can complete temperature compensation for measurement results.
- Ultrasonic transducer has adopted patented sonic matching technology, which helps it strengthen its emission power, enhance the signal intensity and eventually achieve accurate measurement.


Applications

- Water and Wastewater industry
- Pharmaceutical industry
- Chemical industry
- Beverage industry

Specifications


Range	4200B-1:6" to 12", 4200B-2:12" to 25"
Accuracy	±0.25% of range
Resolution	4200B-1:0.019", 4200B-2:0.039"
Blanking Zone	4200B:6" (10cm):4200B-2:12" (20cm)
Beam width	4200B-1:2" (5cm): 4200B-2:3" (7.6cm)
Configuration	Push button and HART
Memory	Non-volatile
Display type	LCD, 6-digit
Display units	Inch, cm, feet, meters, and mA percentage
Supply voltage	12-28VDC
Loop resist	500Ohms @ 24VDC
Signal invert	4-20 mA, 20-4 mA
Temp. comp	Automatic
Ambient temp	-40°F to 160°F (-40°C to 71°C)
Pressure	30 psi (2bar)
Enclosure rating	NEMA 4X (IP66)
Encl. material	Power Coated Aluminum
Conduit entrance	two, ½" NPT
Trans. material	PTFE
Process mount	4200B-1:1.5" NPT, 4200B-2:2" NPT
Classification	General purpose

Dimensional Drawing

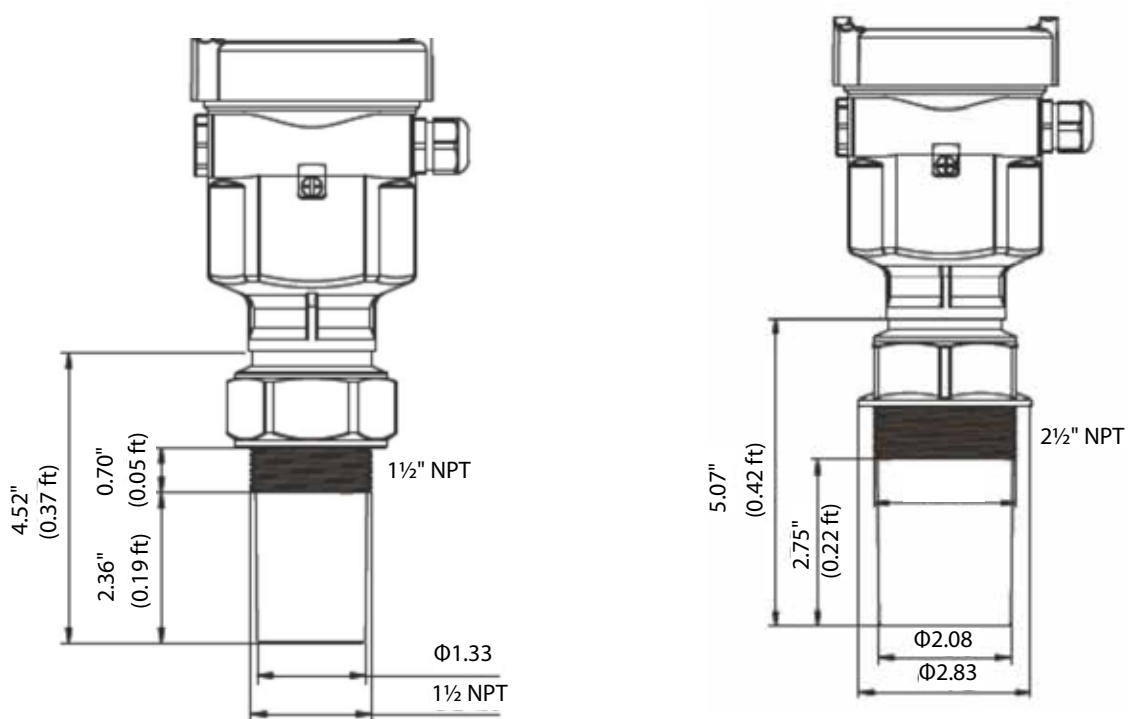


Installation

- 1) Incorrect: Failure to turn the antenna perpendicular to the surface of the target medium.
- 2) Incorrect: Instruments are mounted in the centre of concave or arched vessel tops, which results in multiple echoes.
- 3) Correct

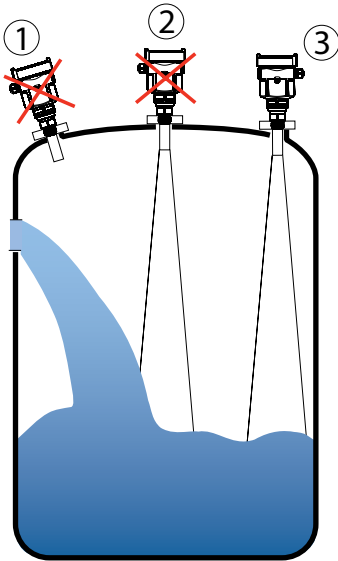

- 1) Incorrect: Mount the instrument in/above filling stream, which results in the measurement of filling stream not the target medium
 - 2) Correct
- Note:** Sun shield or rain-proof is required for outdoor mounting

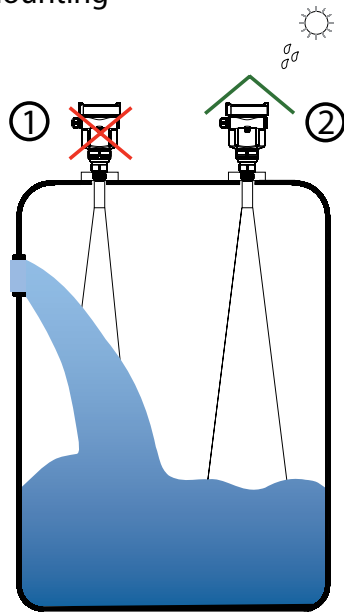

Model Chart

Example	Tek-Sound 4200B	P	B	B	A	N	A	1	Tek-Sound 4200B-P-B-B-A-N-A-1
Series	Tek-Sound 4200B								Two Wire Ultrasonic Level Transmitter with Display
Approval		P							Standard (Without approval)
Material			B						Pu/Pc
Electronic				B					4-20 mA with HART 2-Wire
Housing/Protection					A				Aluminum IP66
Cable Entry						N			two, ½" NPT
Display/Programming							A		LCD, 6 Digit
Range								1	0.5' to 13' range, 1.5" NPT Process Connection
								2	1' to 25' range, 2" NPT Process Connection

Popular Model

Model	Description
4200B-P-B-B-A-N-A-1	0.5' to 13' range, 1.5" NPT Process connection
4200B-P-B-B-A-N-A-2	1' to 25' range, 2" NPT Process connection

Customer Service and Support



TEKMATION LLC reserves the right to change the designs and/or materials of its products without notice. The contents of this publication are the property of TEKMATON and cannot be reproduced by any other party without written permission. All rights reserved. Copyright © 2019 TEKMATON LLC
DOC # TEK/MR/180910/TEK-SOUND/A
TEKMATION LLC



www.tek-trol.com

Tek-Trol is a fully owned subsidiary of TEKMATON LLC. We offer our customers a comprehensive range of products and solutions for process, power, and oil and gas industries. Tek-Trol provides process measurement and control products for Flow, Level, Temperature, and Pressure Measurement, Control Valves and Analyzer systems. We are present in 15 locations globally and are known for our knowledge, innovative solutions, reliable products, and global presence.

Tek-Trol LLC

796 Tek Drive Crystal Lake, IL 60014 USA

Tel : +1 847 857 6076, +1 847 655 7428 Fax : +1 847 655 6147

Email: tektrol@tek-trol.com

www.tek-trol.com